


CAL.T250 MOVEMENT SPECIFICATIONS  
SMILE FACE TYPE QUARTZ COMBINATION. NO(O)JEWELS  
WITH ELECTRO-LUMINESCENT UNIT





T250

1. BASIC SPECIFICATION


- |                         |   |
|-------------------------|---|
| (1) Movement size       | : 27.4mm x 26.0mm (φ30.8mm)   |
| (2) Total thickness     | : 4.91mm  |
| (3) Accuracy            | : 20 sec/month (worn under normal circumstances)  |
| (3) Battery type        | : SR927W or equivalent  |
| (4) Battery life        | : APPROX. 3 years<br>3 years for customer's normal pusher operation based upon the use of 3 sec/day for electro-luminescent (E/L) display and 20 sec/day for alarm and 24 times/day for buzzer) |
| (5) Functions           | : Analogue 3 hands<br>Digital Hour, Minute, Second (6 digit)<br>Calendar / Alarm / Chime / Stop watch   |
| (6) Additional features | : Alarm monitor<br>Automatic end of month correction<br>Switching between 12 and 24 hour display<br>E/L display ( <u>U.S.PATENT NO. : 4208869</u> )   |

\* This specification might be changed without previous notice.


2. HOW TO USE THE FUNCTION

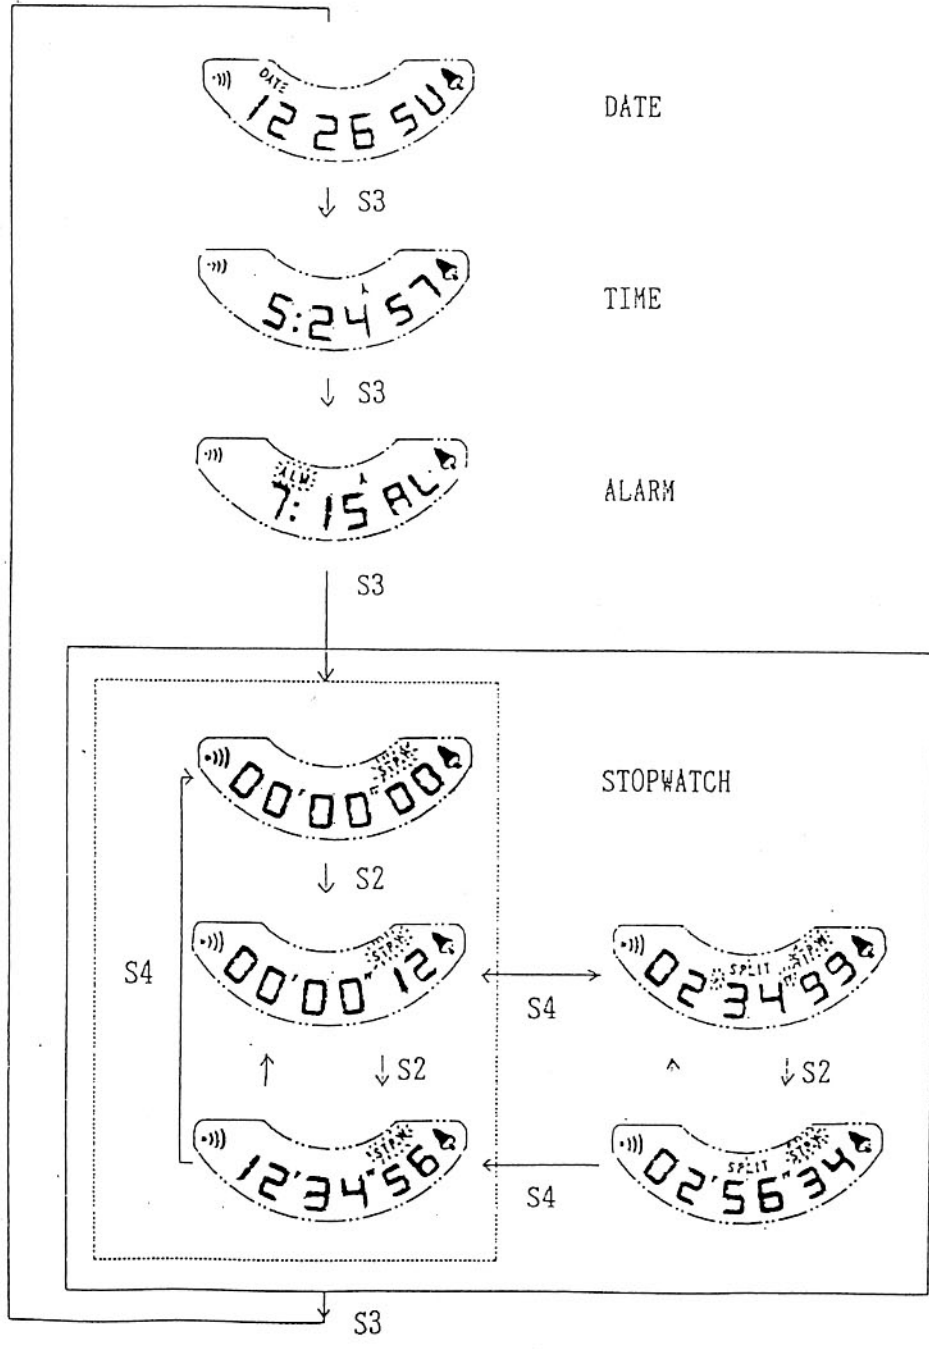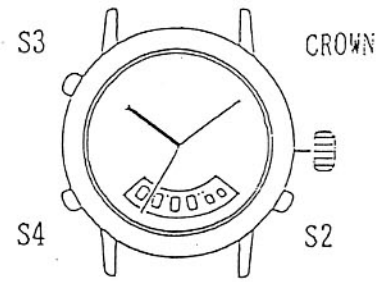


### 3. HOW TO ADJUST TIME

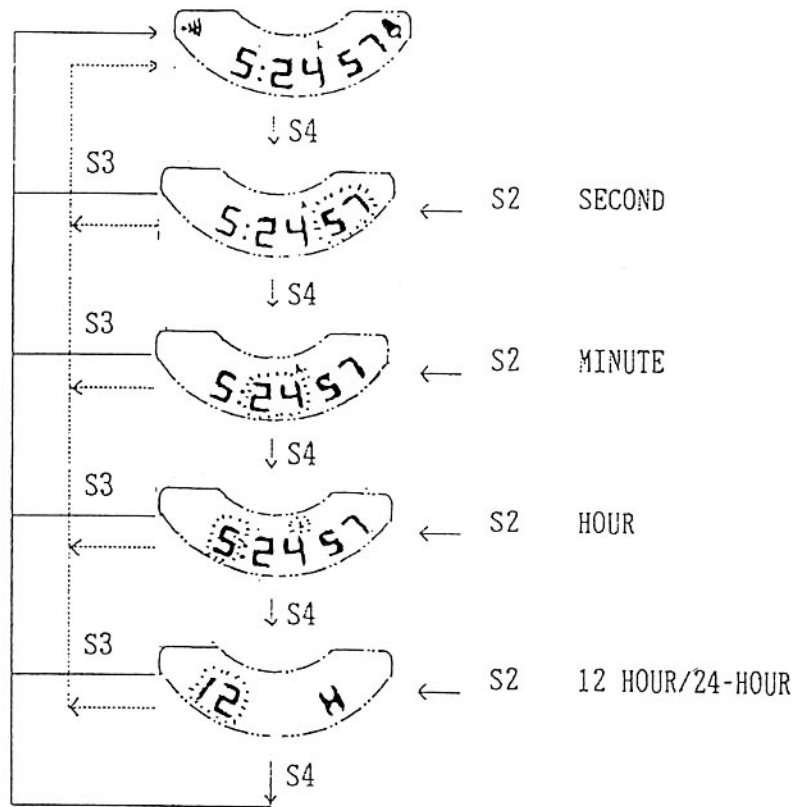

### 4. HOW TO ADJUST CALENDAR

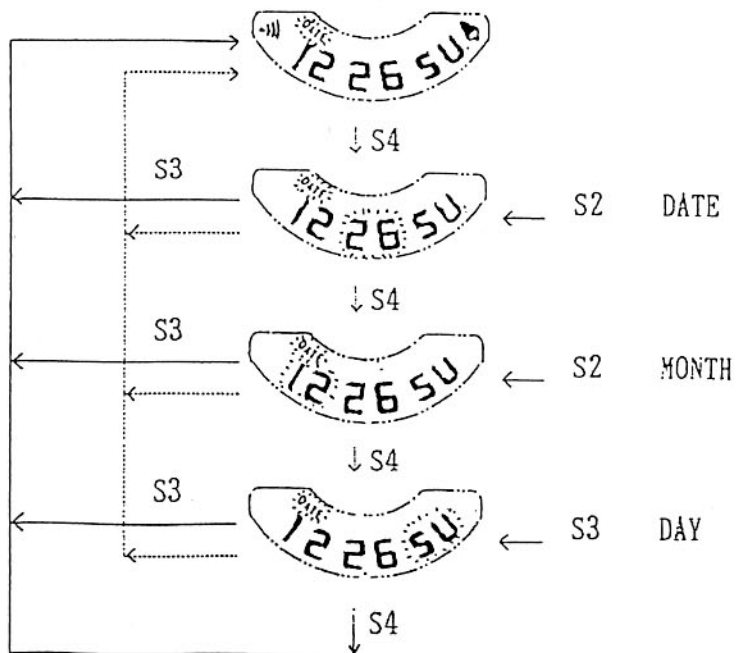

5. HOW TO SET ALARM

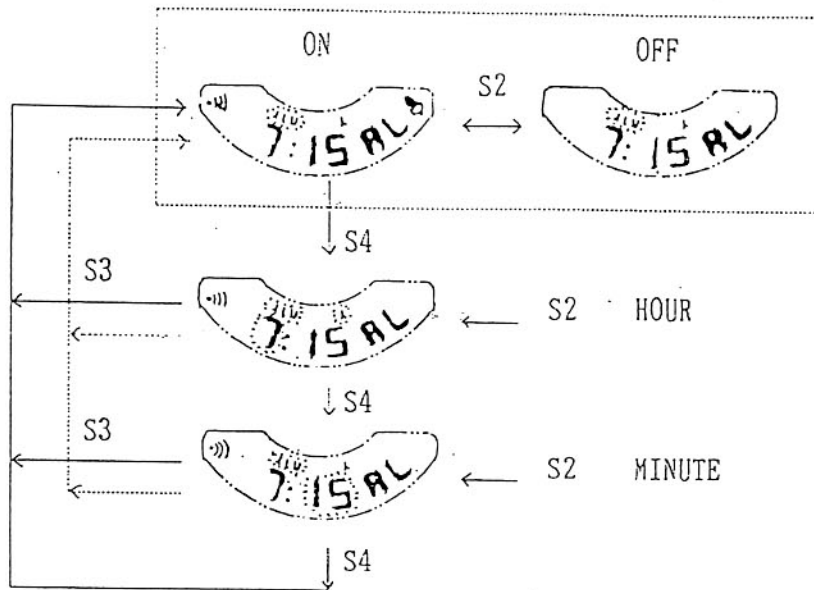

6. HOW TO USE STOPWATCH

