





**SEIKO  
LASSALE**

**QUARTZ**

**Cal. 7752A**

**PARTS  
CATALOGUE**

# Cal. 7752A

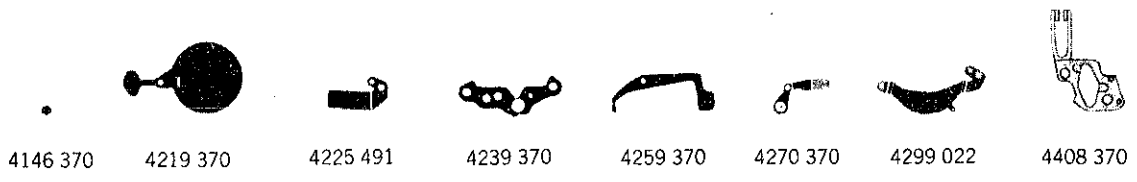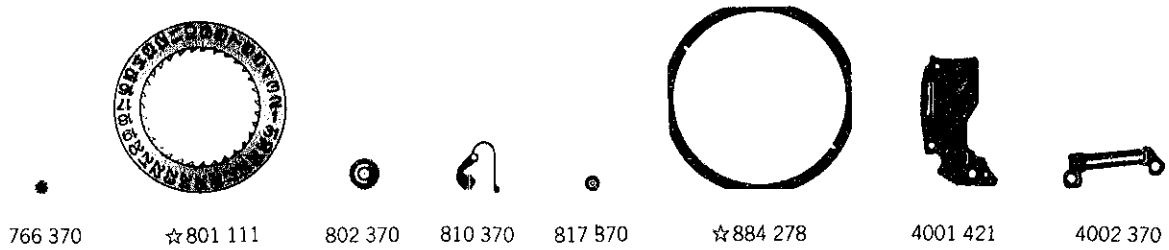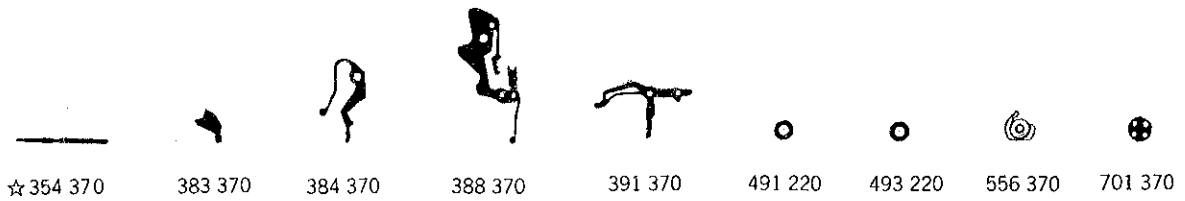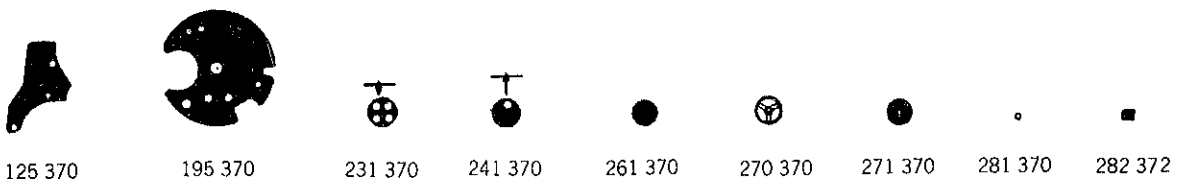

☆SEIKO TR916SW

012 491	012 492	012 493	012 794	017 570
017 658	017 659	017 660	017 972	3/1

☆⇨ Please see remarks on the next reverse page.

# Cal. 7752A

## Characteristics

Casing diameter : 22.0 × 21.0 mm  
 Maximum height : 1.9 mm without battery  
 Jewels : 6 j  
 Frequency of quartz crystal oscillator : 32,768 Hz (Hz = Hertz . . . . Cycles per second)  
 Driving system : Step motor (2 poles)  
 Regulation system : Trimmer condenser  
 Train wheel setting  
 Calendar (Date)  
 Instant setting device for date calendar  
 Battery life indicator : Second hand moves in two-second interval

PART NO.	PART NAME	PART NO.	PART NAME
<b>125 370</b>	Train wheel bridge	<b>4408 370</b>	Insulating spacer for circuit block
<b>195 370</b>	Calendar plate	011 333	Upper hole jewel for third wheel
<b>231 370</b>	Third wheel & pinion	011 333	Upper hole jewel for fifth wheel
<b>241 370</b>	Fourth wheel & pinion	011 409	Lower hole jewel for step rotor
<b>261 370</b>	Minute wheel	011 527	Lower hole jewel for fifth wheel
<b>270 370</b>	Center minute wheel with cannon pinion	011 541	Upper hole jewel for fourth wheel
		011 541	Upper hole jewel for step rotor
<b>271 370</b>	Hour wheel	<b>012 491</b>	Train wheel bridge screw
<b>281 370</b>	Setting wheel	<b>012 491</b>	Circuit block screw
<b>282 372</b>	Clutch wheel	<b>012 491</b>	Calendar plate screw
☆ <b>354 370</b>	Winding stem	<b>012 492</b>	Setting lever spring screw
<b>383 370</b>	Setting lever	<b>012 493</b>	Date finger screw
<b>384 370</b>	Yoke	<b>012 794</b>	Coil block screw
<b>388 370</b>	Setting lever spring	<b>017 570</b>	Minute wheel pin
<b>391 370</b>	Train wheel setting lever	<b>017 658</b>	Tube for train wheel bridge
<b>491 220</b>	Dial washer	<b>017 659</b>	Tube for circuit block screw (A)
<b>493 220</b>	Hour wheel ring (thickness 0.03mm)	<b>017 660</b>	Tube for circuit block screw (B)
493 370	Hour wheel ring (thickness 0.01 mm)	<b>017 972</b>	Eccentric dial pin
<b>556 370</b>	Date finger	SEIKO TR916SW	Silver (II) oxide battery
<b>701 370</b>	Fifth wheel & pinion	Maxell SR916SW	Silver oxide battery
<b>766 370</b>	Intermediate minute wheel		
☆ <b>801 111</b>			
☆801 112			
☆801 116			
☆801 117			
☆801 285			
☆801 286			
☆801 287	Date dial		
☆801 288			
☆801 291			
☆801 292			
☆801 293			
☆801 294			
<b>802 370</b>	Date driving wheel		
<b>810 370</b>	Date jumper		
<b>817 370</b>	Intermediate date wheel		
☆ <b>884 278</b>			
☆884 281	Holding ring for dial		
<b>4001 421</b>	Circuit block		
<b>4002 370</b>	Coil block		
<b>4146 370</b>	Step rotor		
<b>4219 370</b>	Battery connection insulator		
<b>4225 491</b>	Battery clamp		
<b>4239 370</b>	Rotor stator		
<b>4259 370</b>	Anti-magnetic shield plate		
<b>4270 370</b>	Battery connection (—)		
<b>4299 022</b>	Battery lower plate		

☆ ⇨ Please see remarks on the reverse page.  
 Part numbers in light letters are not shown in photos.

# Cal. 7752A

## Remarks :

### Winding stem

☆354 370.....Refer to the photograph on the front page.

If the combination of the winding stem and case is unknown, check the case number and refer to "SEIKO LASSALE Quartz Casing Parts Catalogue" to choose a corresponding winding stem.

### Date dial

☆801 111 (Black figures on white background) }  
☆801 285 (White figures on black background) } .....The outside diameter is **22.4 mm.**  
☆801 291 (Black figures on gold background) }  
☆801 112 (Black figures on white background) }  
☆801 287 (White figures on black background) } .....The outside diameter is **20.9 mm.**  
☆801 293 (Black figures on gold background) }

.....Used when both the crown and the calendar frame are located at **3** o'clock position.

☆801 116 (Black figures on white background) }  
☆801 286 (White figures on black background) } .....The outside diameter is **22.4 mm.**  
☆801 292 (Black figures on gold background) }  
☆801 117 (Black figures on white background) }  
☆801 288 (White figures on black background) } .....The outside diameter is **20.9 mm.**  
☆801 294 (Black figures on gold background) }

.....Used when the crown is located at **3** o'clock position and the calendar frame is at **6** o'clock position.

If any other type of date dial is required, specify ① cal. No. ② The crown position ③ The calendar frame position ④ Dial No. and ⑤ Color of date dial.

### Holding ring for dial

☆884 278 } .....The type of a holding ring for dial is determined based on the design of cases.  
☆884 281 }

If the shape of holding ring for dial is different from the photograph, check the case number and refer to "SEIKO LASSALE Quartz Casing Parts Catalogue" to choose a corresponding holding ring for dial.