

MIYOTA

STOPWATCH

MOVEMENT SPECIFICATIONS

CAL. : JS00

12-1/2 LINGE, 3 EYES WITH *STOPWATCH* FUNCTION

ANALOGUE QUARTZ, NO JEWEL

BY CITIZEN WATCH CO., LTD. JAPAN

MANUFACTURED IN JAPAN

1. BASIC SPECIFICATIONS

(1) Cal. No.

*TO CONFIRM WITH MOV'T DRAWING ATTACHED

CALIBRE	JS00
Ligne Size*mm	12-1/2 Φ28.20mm
Date	X
Total height	4.18mm
Battery life	Approx. 2 years*
Battery	SILVER OXIDE SR621SW or equivalent

(* 30 minutes chronograph operation per day)

(2) Time standard

Type of quartz : Tuning fork type quartz crystal

Frequency : 32,768Hz

Accuracy : **+/-20 s/month** worn under normal circumstances

(3) Balanceable weight of hand

Minute hand : Max. 0.4 μN.m

Second hand : Max. 0.07 μN.m

Other small hands : Max. 0.02 μN.m


(4) Function

Stopwatch 1 sec. basis (Up to 29 min. 59 sec.)

Powercell Saving Reset Mechanism (PSRM)

Over-loading Compensation Device (OLCD)

Digital Frequency Control (DFC) for time adjustment

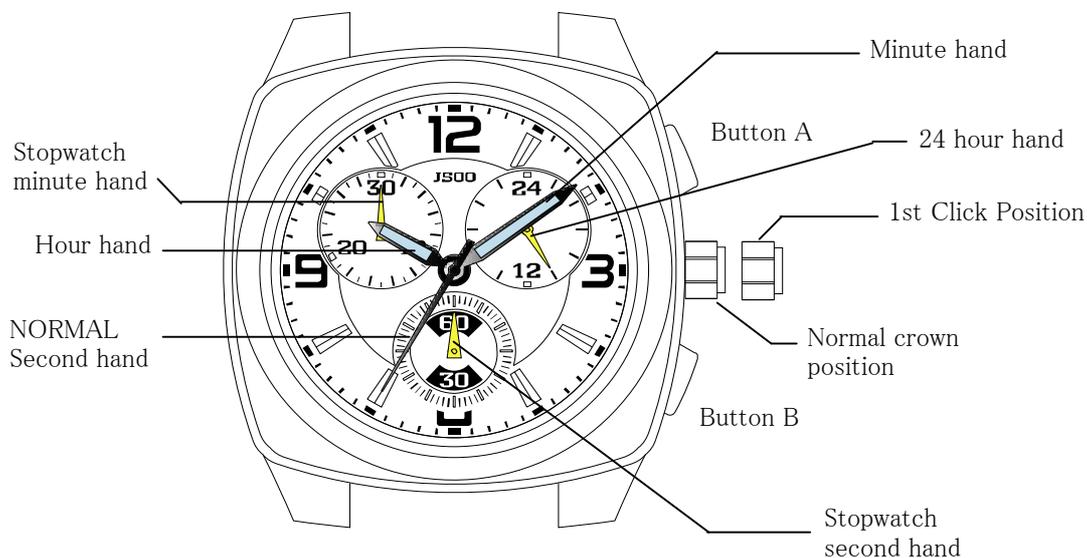

Button A : START / STOP

Button B : RESET

1st Click Position : TIME ADJUSTMENT / REFERENCE POSITION ADJUSTMENT

2.SEPARATED PARTS

Setting stem x1

Code
 Length from movement center to far end
 of setting stem
 Thread.....

065-505
 20.03mm

Φ0.9mm x 11.68mm

3.OTHERS

* Measurement of time rate

The unit (gate) time of measurement must be set at "10 sec." or integer fold value of 10 sec. owing to the DFC system, and the measurement must be performed in the form of complete watch.

* Marking on movement

JAPAN
 MIYOTA CO.
 JS00
 NO JEWELS

* Typical clearance


Mov't - Caseback
 Top of hands - Glass

* subject to the glass, case structure, and the length of hand

minimum 150 microns
 300 - 400 microns *

4. INSTRUCTIONS MANUAL

A) DISPLAYS AND BUTTONS

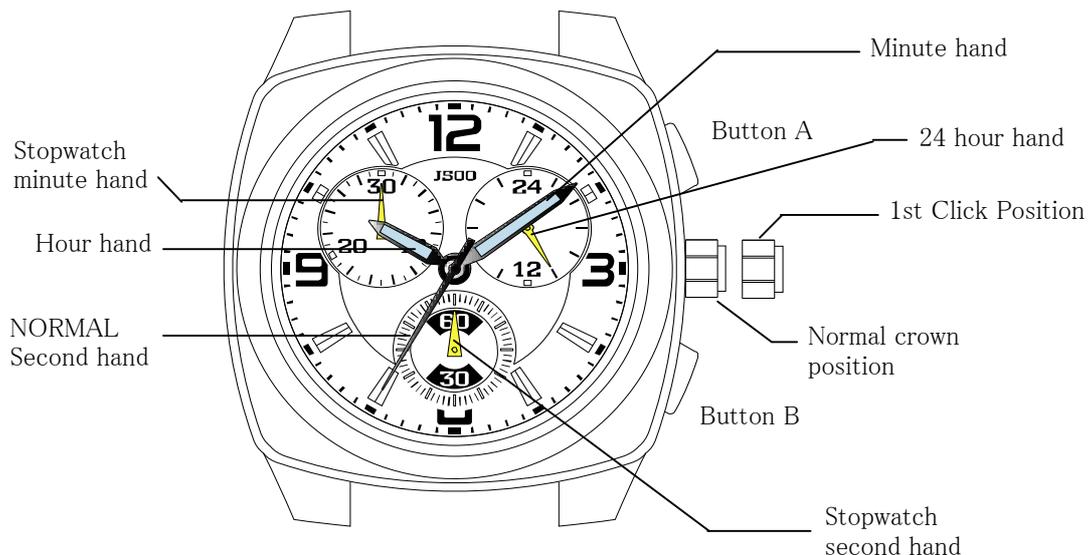

B) SETTING THE TIME

1. Pull the crown out to the 1st position.
2. Turn the crown to set hour and minute hands.
3. When the crown is pushed back to the normal position in synchronization with a time signal, second hand begins to run.



C) USING THE STOPWATCH

This stopwatch is able to measure and display time in 1 second united up to maximum of 30 minutes. Stopwatch will stop automatically after running continuously for 30 minutes.

Measuring time with the stopwatch


1. Press button "A" to start the stopwatch.
2. The stopwatch can be started and stopped each time button "A" is pressed.
3. Pressing button "B" resets the stopwatch and stopwatch minute and second hands return to their ZERO positions.

*** Button A / B does not function during resetting the stopwatch.**

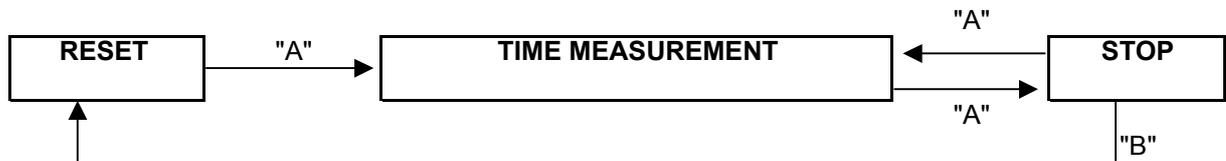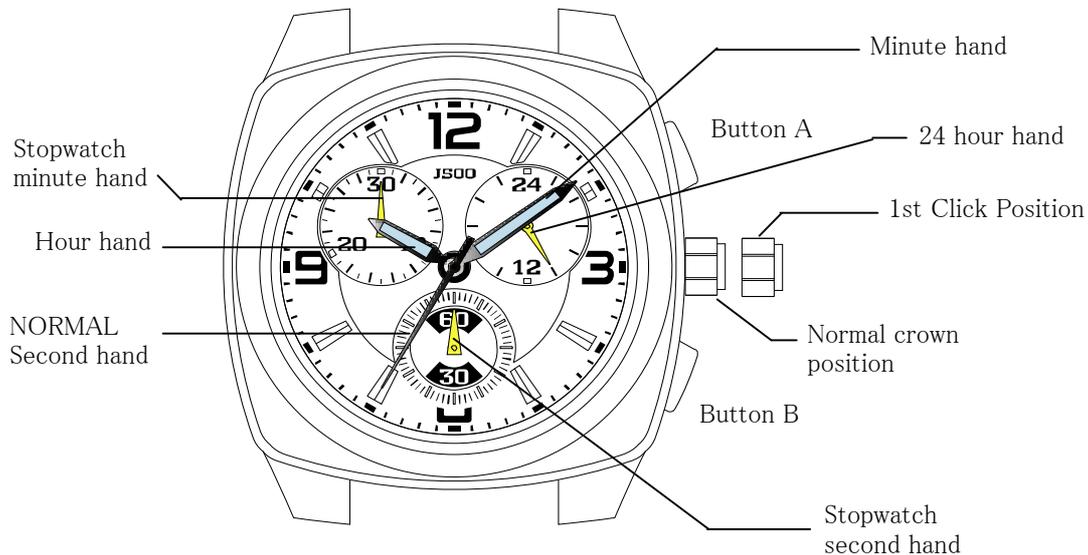

D) STOPWATCH RESET (INCL. AFTER REPLACING BATTERY)


This procedure should be performed when the stopwatch second hand does not return to the ZERO second position after the stopwatch has been reset, and including after the battery has been replaced.

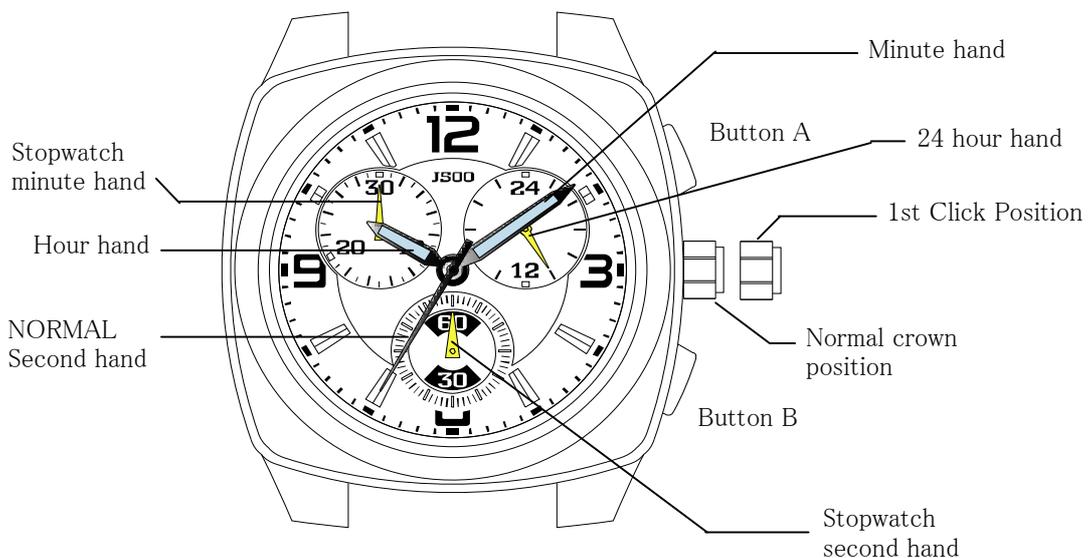

1. Pull the crown out to the 1st click position.
2. Press button "A" to set the stop watch second hand to the ZERO position.
 - *The stopwatch minute hand is synchronized with stopwatch second hand.
 - *The stop watch second hand can be advanced rapidly by continuously pressing button "A".
3. Once the hands have been zeroed, reset the time and return the crown to its normal position.

E) FITTING METHOD OF HANDS

Place the module on case back shown in the figure and position the reference hand, then fit the hands according to the following procedures.

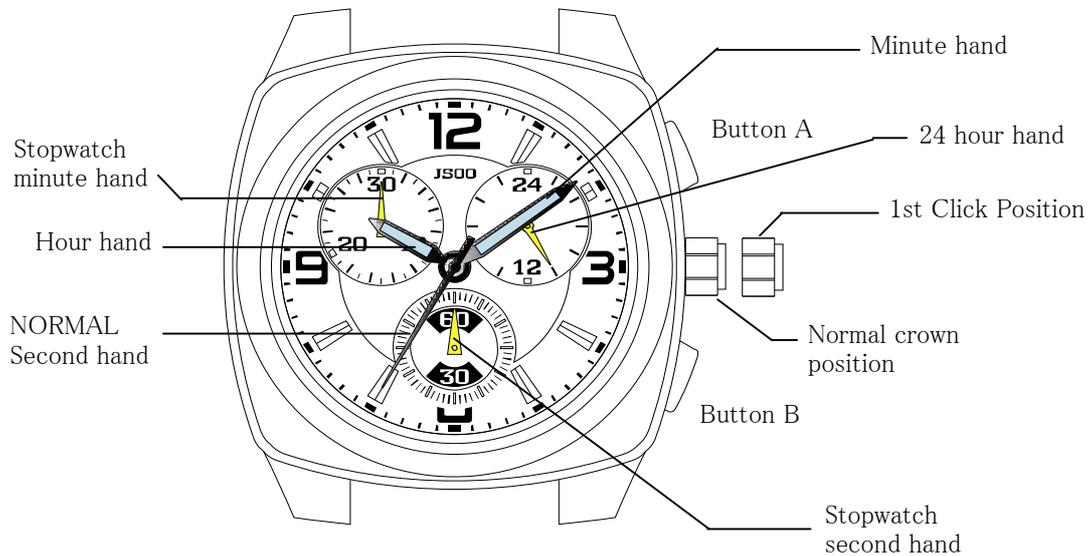

1. Pull out the crown to the time setting position. (1st Click Position)

2. Fit all the hands to the 12-o'clock position.

When fitting the hands, remove the case back and place the movement on work stand (mount).

These specifications might be changed without prior notice.